




1668 Outreach Walk Through

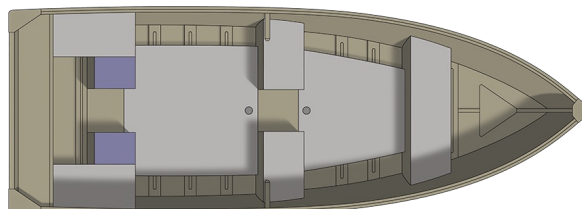

Specs

GENERAL	1668 OUTREACH WALK THROUGH	
Overall Length	16'	4.88 m
Beam	68"	173 cm
Transom Height	20"	51 cm
Weight (Boat only, dry)	375#	170 kg
Max Weight Capacity	1082#	491 kg
Max Person Capacity	5	
Min HP Capacity	9.9	
Max HP Capacity	30	
Fuel Capacity	Portable	
Aluminum Gauge Bottom	.061"	
Aluminum Gauge Sides	.061"	
Aluminum Gauge Transom	.065"	
Number of ribs	14	

Colors

STANDARD	
 	Unpainted base w/Charcoal accent & non-skid Matte Gray interior

Features

SEATING

Marine-grade vinyl wrapped bench seats

Seats, split (stern)

Seats, split (midship)

INTERIOR FEATURES

Battery Holder (1)

Stern storage compartment

Removable marine-grade vinyl wrapped pressure-treated wood floor

Heavy-duty tubular seat to gunnel braces

Full-width self-draining splashwell

Center side storage compartments

EXTERIOR FEATURES

Riveted aluminum hull

Semi-V hull

Keel, extruded full length, welded (center)

Paint Process, Enamel

Aluminum clad transom

Gunnel, extruded

Corner caps, formed

Cast bow plate

Bow eye

Transom handles

Transom corner castings w/handles

Spray rails, extruded

Transom drain plug

Options

ACCESSORIES

Deployable ladder

Oar Lock Kit

TRAILERS

Basic Bunk Galvanized Trailer

Spare Tire

Tie down, pair

Transom Saver