


# 1460 Outreach

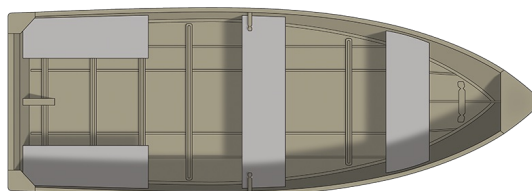

## Specs

### GENERAL

### 1460 OUTREACH

|                         |          |        |
|-------------------------|----------|--------|
| Overall Length          | 14'      | 4.27 m |
| Beam                    | 60"      | 152 cm |
| Transom Height          | 15"      | 38 cm  |
| Weight (Boat only, dry) | 201#     | 91 kg  |
| Max Weight Capacity     | 729#     | 331 kg |
| Max Person Capacity     | 4        |        |
| Min HP Capacity         | 9.9      |        |
| Max HP Capacity         | 20       |        |
| Fuel Capacity           | Portable |        |
| Aluminum Gauge Bottom   | .061"    |        |
| Aluminum Gauge Sides    | .051"    |        |
| Aluminum Gauge Transom  | .065"    |        |
| Number of ribs          | 12       |        |

## Colors

### STANDARD

Unpainted base w/Charcoal accent & non-skid Matte Gray interior

## Features

### SEATING

Marine-grade vinyl wrapped bench seats

Seats, split (stern)

Seats, bench (2)

### INTERIOR FEATURES

Heavy-duty tubular seat to gunnel braces

### EXTERIOR FEATURES

Riveted aluminum hull

Semi-V hull

Keel, extruded full length, welded (center)

Aluminum clad transom

Gunnel, extruded

Corner caps, formed

Formed bow plate

Bow eye

Transom handles

Transom corner castings w/handles

Paint Process, Enamel

Spray rails, extruded

Transom drain plug

## Options

### ACCESSORIES

Deployable ladder

Oar Lock Kit

### TRAILERS

Basic Bunk Galvanized Trailer

Spare Tire

Tie down, pair

Transom Saver